

The background image shows a male technician wearing a white hard hat and safety glasses, focused on his work. He is holding a yellow multimeter and testing the wiring inside an open electrical control panel. The panel is filled with various electrical components, including a large terminal block with many wires. The scene is set outdoors, with a blurred background of a building and sky. Large, stylized blue and dark blue geometric shapes are overlaid on the top and bottom corners of the image.


L D V M

COMPRESSORS

“YOUR PARTNER IN RELIABLE POWER SOLUTION”

Screw Compressor Fixed Speed (Direct Drive)

MODEL	PRESSURE	INSTALLED MOTOR RATING (KW)	CFM	M ³ / MIN	MACHING DIMENSION (L*B*H) MM / (WEIGHT) KG	NOISE (dB)	AIR OUTLET (INCH)
DC - 10HP D	08 / 10 / 13	7.5	46 / 34 / 30	1.3 / 0.96 / 0.85	900*600*800 / 220	60±2	G 1/2"
DC - 15HP D	08 / 10 / 13	11	65 / 46 / 39	1.84 / 1.3 / 1.1	1100*730*980 / 350	62±2	G 3/4"
DC - 20HP D	08 / 10 / 13	15	88 / 71 / 60	2.49 / 2.01 / 1.7	1100*730*980 / 360	62±2	G 3/4"
DC - 25HP D	08 / 10 / 13	18.5	113 / 95 / 78	3.2 / 2.69 / 2.21	1200*880*1080 / 510	64±2	G 1"
DC - 30HP D	08 / 10 / 13	22	131 / 113 / 99	3.71 / 3.2 / 2.8	1200*880*1080 / 510	64±2	G 1"
DC - 40HP D	08 / 10 / 13	30	181 / 160 / 124	5.12 / 4.53 / 3.51	1460*980*1230 / 650	66±2	G 1 1/2"
DC - 50HP D	08 / 10 / 13	37	240 / 191 / 138	6.8 / 5.41 / 3.91	1460*980*1230 / 700	66±2	G 1 1/2"
DC - 60HP D	08 / 10 / 13	45	275 / 242 / 212	7.8 / 6.9 / 6.00	1460*980*1230 / 780	66±2	G 1 1/2"
DC - 75HP D	08 / 10 / 13	55	365 / 307 / 265	10.33 / 8.69 / 7.5	1750*1280*1590 / 1250	68±2	G 2"
DC - 100HP D	08 / 10 / 13	75	476 / 410 / 346	13.48 / 11.61 / 9.8	1750*1280*1590 / 1350	68±2	G 2"
DC - 120HP D	08 / 10 / 13	90	561 / 501 / 419	15.88 / 14.18 / 11.86	2450*1660*1700 / 1950	70±2	G 2 1/2"
DC - 150HP D	08 / 10 / 13	110	717 / 600 / 516	20.3 / 16.99 / 14.61	2450*1660*1700 / 2200	70±2	G 2 1/2"
DC - 175HP D	08 / 10 / 13	132	883 / 706 / 636	25 / 19.99 / 18.01	2450*1660*1700 / 2500	70±2	G 2 1/2"
DC - 220HP D	08 / 10 / 13	160	1035 / 930 / 740	29.3 / 26.33 / 20.95	2700*1460*1900 / 3480	78±2	G 3"

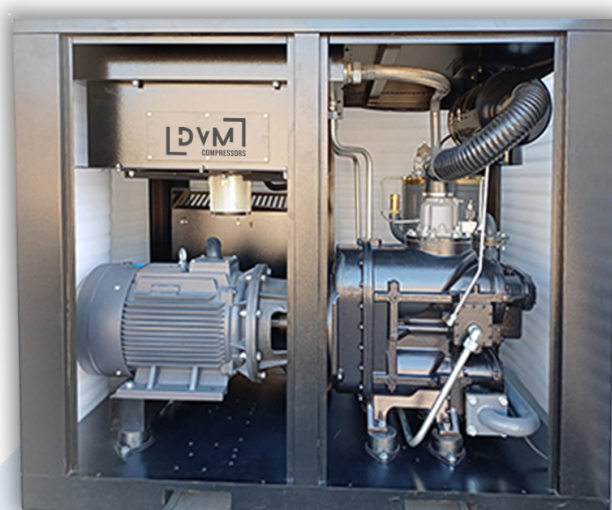

REFRIGERATED AIR DRYER






FEATURES

- ✓ Easy Installation
- ✓ Less Maintenance
- ✓ Environment Friendly
- ✓ Power Saving
- ✓ Inlet temperature 40 C degree
- ✓ Dew point 2 C - 3 C degree

BASE MODEL	CFM	PRESSURE	AIR CONNECTION IN/OUT	RATED POWER* KW AIR COOLED
DC-7.5AD	30	16	1/2 BSP (F)	0.15
DC-10AD	45	16	1/2 BSP (F)	0.20
DC-15AD	68	16	1 BSP (F)	0.40
DC-20AD	85	16	1 BSP (F)	0.50
DC-25AD	100	16	1 1/2 BSP (F)	0.60
DC-30AD	134	16	1 BSP (F)	1.00
DC-40AD	180	16	1 1/2 BSP (F)	0.90
DC-50AD	250	16	2 BSP (F)	1.40
DC-60AD	300	16	2 BSP (F)	1.60
DC-75AD	400	16	2 BSP (F)	1.90
DC-100AD	500	16	3"NBASME Flg	2.30
DC-125AD	600	16	3"NBASME Flg	2.80
DC-180AD	800	16	3"NBASME Flg	3.80
DC-220AD	1000	16	4"NBASME Flg	5.00
DC-250AD	1250	16	4"NBASME Flg	5.70
DC-300AD	1500	12.5	5"NBASME Flg	6.80
DC-400AD	2000	12.5	6"NBASME Flg	8.70
DC-500AD	2500	12.5	6"NBASME Flg	11.00


BELT DRIVEN TWO STAGE AIR COMPRESSOR

This Air Compressor are built with shorter air filling time, energy saving, longer product life & especially suitable for industrial application. They suitable for two-wheeler & four wheeler garage, plastic industries, steel fabrication, foundries, sand blasting, paper industries, packing plant,etc. Air Compressors range start from 03 HP - 20 HP

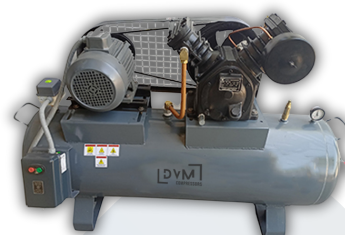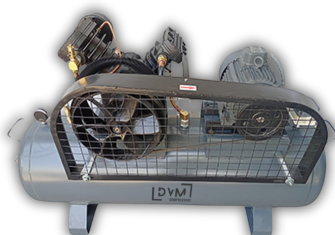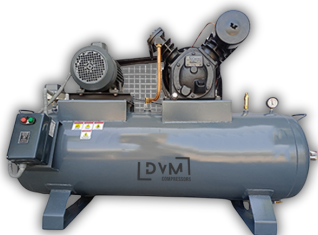

MODEL NO.	HP	TANK	CFM	PRESSURE	WEIGHT
DC-22160	3	160	9.79	12.3 Kg	200
DC-37250	5	225	17.32	12.3 Kg	220
DC-55250	7.5	225	26.42	12.3 Kg	270
DC-75300	10	300	33.4	12.3 Kg	320
DC-11500	15	500	55	12.3 Kg	450
DC-15500	20	500	65	12.3 Kg	500

INDUSTRIES WHERE WE SERVER



DVM COMPRESSORS LLP

We are ISO Certified Company

CONTACT DETAILS

 +91 98988 86073 | +91 98988 89093 | +91 98988 89573

 www.dvmcompressors.com |  sales@dvmcompressors.com

 Factory No. 11, Jay Industrial Park,
Nana Chiloda, SP Ring Road East, Ahmedabad, Gujarat - 382330